

Ecophon Focus™ F

Ecophon Focus™ F installs directly to an existing plaster ceiling, boarding, battens or concrete, to create a ceiling with a smooth appearance. For applications requiring a ceiling mechanically secured to the structural soffit.




Ten Con Ten, Madrid, Spain


SYSTEM RANGE




| | | |
|-----------------|---------|----------|
| Size, mm | 600x600 | 1200x600 |
| Direct | • | • |
| Thickness (THK) | 20 | 20 |
| Inst. Diag. | M15 | M15 |



Focus F tile



Section of Focus F system



Focus F system



Focus F is installed by screw fixing


Acoustic



Sound Absorption:

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.

α_p , Practical sound absorption coefficient

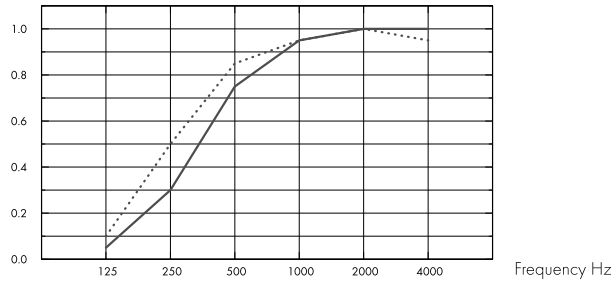

- Focus F 20 mm, 20 mm o.d.s.
- Focus F 20 mm, 40 mm o.d.s.
- o.d.s = overall depth of system

| THK mm | o.d.s. mm | α_p , Practical sound absorption coefficient | | | | | | α_w | Sound absorption class |
|--------|-----------|---|--------|--------|---------|---------|---------|------------|------------------------|
| | | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz | | |
| 20 | 20 | 0.05 | 0.30 | 0.75 | 0.95 | 1.00 | 1.00 | 0.60 | C |
| 20 | 40 | 0.10 | 0.50 | 0.85 | 0.95 | 1.00 | 0.95 | 0.80 | B |

| THK mm | o.d.s. mm | NRC | SAA |
|--------|-----------|------|------|
| 20 | 20 | 0.75 | 0.76 |
| 20 | 40 | 0.85 | 0.82 |

Indoor Air Quality



| Certificate / Label | |
|------------------------------|-----|
| Eurofins Indoor Air Comfort® | IAC |
| French VOC | A |
| Finnish M1 | • |



Environmental Footprint



| | kg CO ₂ equiv/m ² |
|---------|---|
| Focus F | 4,90 |

Life-cycle stages A1 to C4 from EPD, in conformity with ISO 14025 / EN 15804

Circularity



| | |
|--|------------------|
| Minimum post-consumer recycled content | 59% |
| Recyclability | Fully recyclable |



Fire safety

| Country | Class | |
|---------|------------|----------|
| Europe | EN 13501-1 | A2-s1,d0 |

The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182.



Humidity Resistance

Class C, relative humidity 95% and 30°C, according to EN 13964:2014



Visual appearance

White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.



Cleanability

Daily dusting and vacuum cleaning. Weekly wet wiping.



Accessibility

The tiles are not demountable.



Installation

Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification. For best result the surface should be even, however an acceptable result could be achieved on slightly uneven surfaces. If very uneven surfaces - installation of furring (evenly spaced timber battens) as the substrate for the tiles is recommended.



System weight

The weight of the system should be approximately 2,5 kg/m²



Mechanical properties


Additional live load has to be fixed to the soffit.



CE

Ecophon ceiling systems are CE marked according to the European harmonized standard EN13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.


INSTALLATION DIAGRAM (M15) FOR ECOPHON FOCUS F

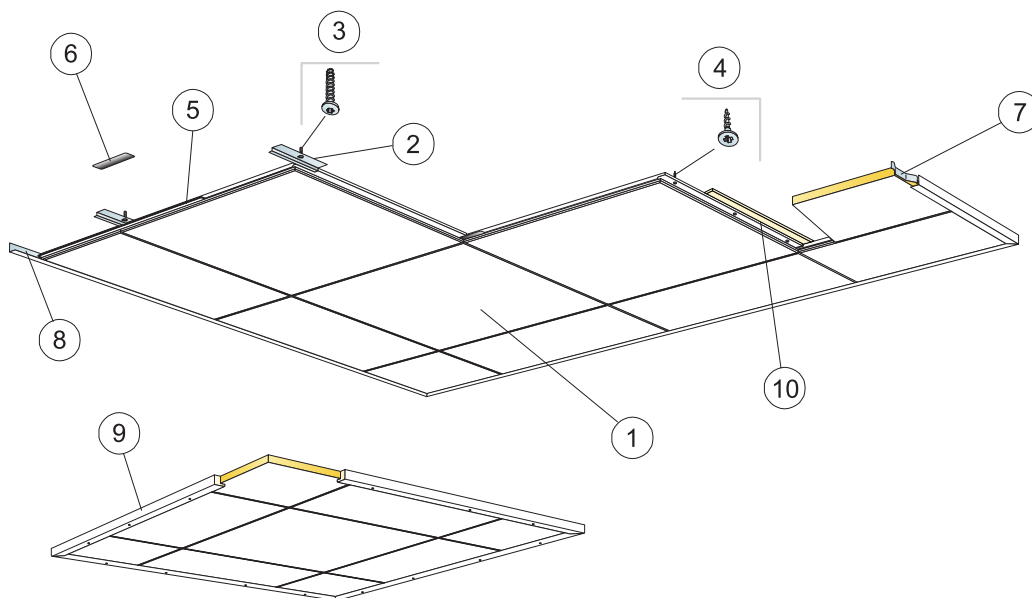


© Ecophon Group

QUANTITY SPECIFICATION (EXCL. WASTAGE)


| | Size, mm | |
|--|-------------------------|-------------------------|
| | 600x600 | 1200x600 |
| 1 Focus F | 2,8/m ² | 1,4/m ² |
| 2 Connect Direct fixing plate, installed at 600 mm centres (for use in concrete) | 2,8/m ² | 2,8/m ² |
| 3 Connect Anchor screw, installed at 600 mm centres (for use in concrete) | 2,8/m ² | 2,8/m ² |
| 4 Connect Installation screw MVL (for use in plasterboard or timber) | 8,3/m ² | 7/m ² |
| 5 Connect Spline F, L=600 mm. Must be used in Sweden, Denmark, Norway and Finland at fireclass 'Tändskyddande beklädnad' | 2,8/m ² | 1,4/m ² |
| 6 Connect Spline, L=150 mm | 2,8/m ² | 1,4/m ² |
| 7 Connect Wall spring spacer | 1/panel in the last row | 2/panel in the last row |
| 8 Connect Angle trim, fixed at 300 mm centres | as required | as required |
| 9 For use when installing floating ceilings: Connect Wood trim, L=2500 mm, fixed at 500 mm centres | as required | as required |
| 10 Timber installed at 600 mm centres (300 mm if thermal insulation is placed above), with the screw fixings along the timber. | as required | as required |
| Δ Min. overall depth of system: 20 mm | - | - |
| δ Min. demounting depth: The system is not demountable | - | - |



See Quantity specification



Installation in concrete



Installation in plasterboard or timber

| Size, mm | Max live load (N) | Min load bearing capacity (N) |
|-------------|-------------------|-------------------------------|
| 600x600x20 | - | - |
| 1200x600x20 | - | - |

Live load/load bearing capacity